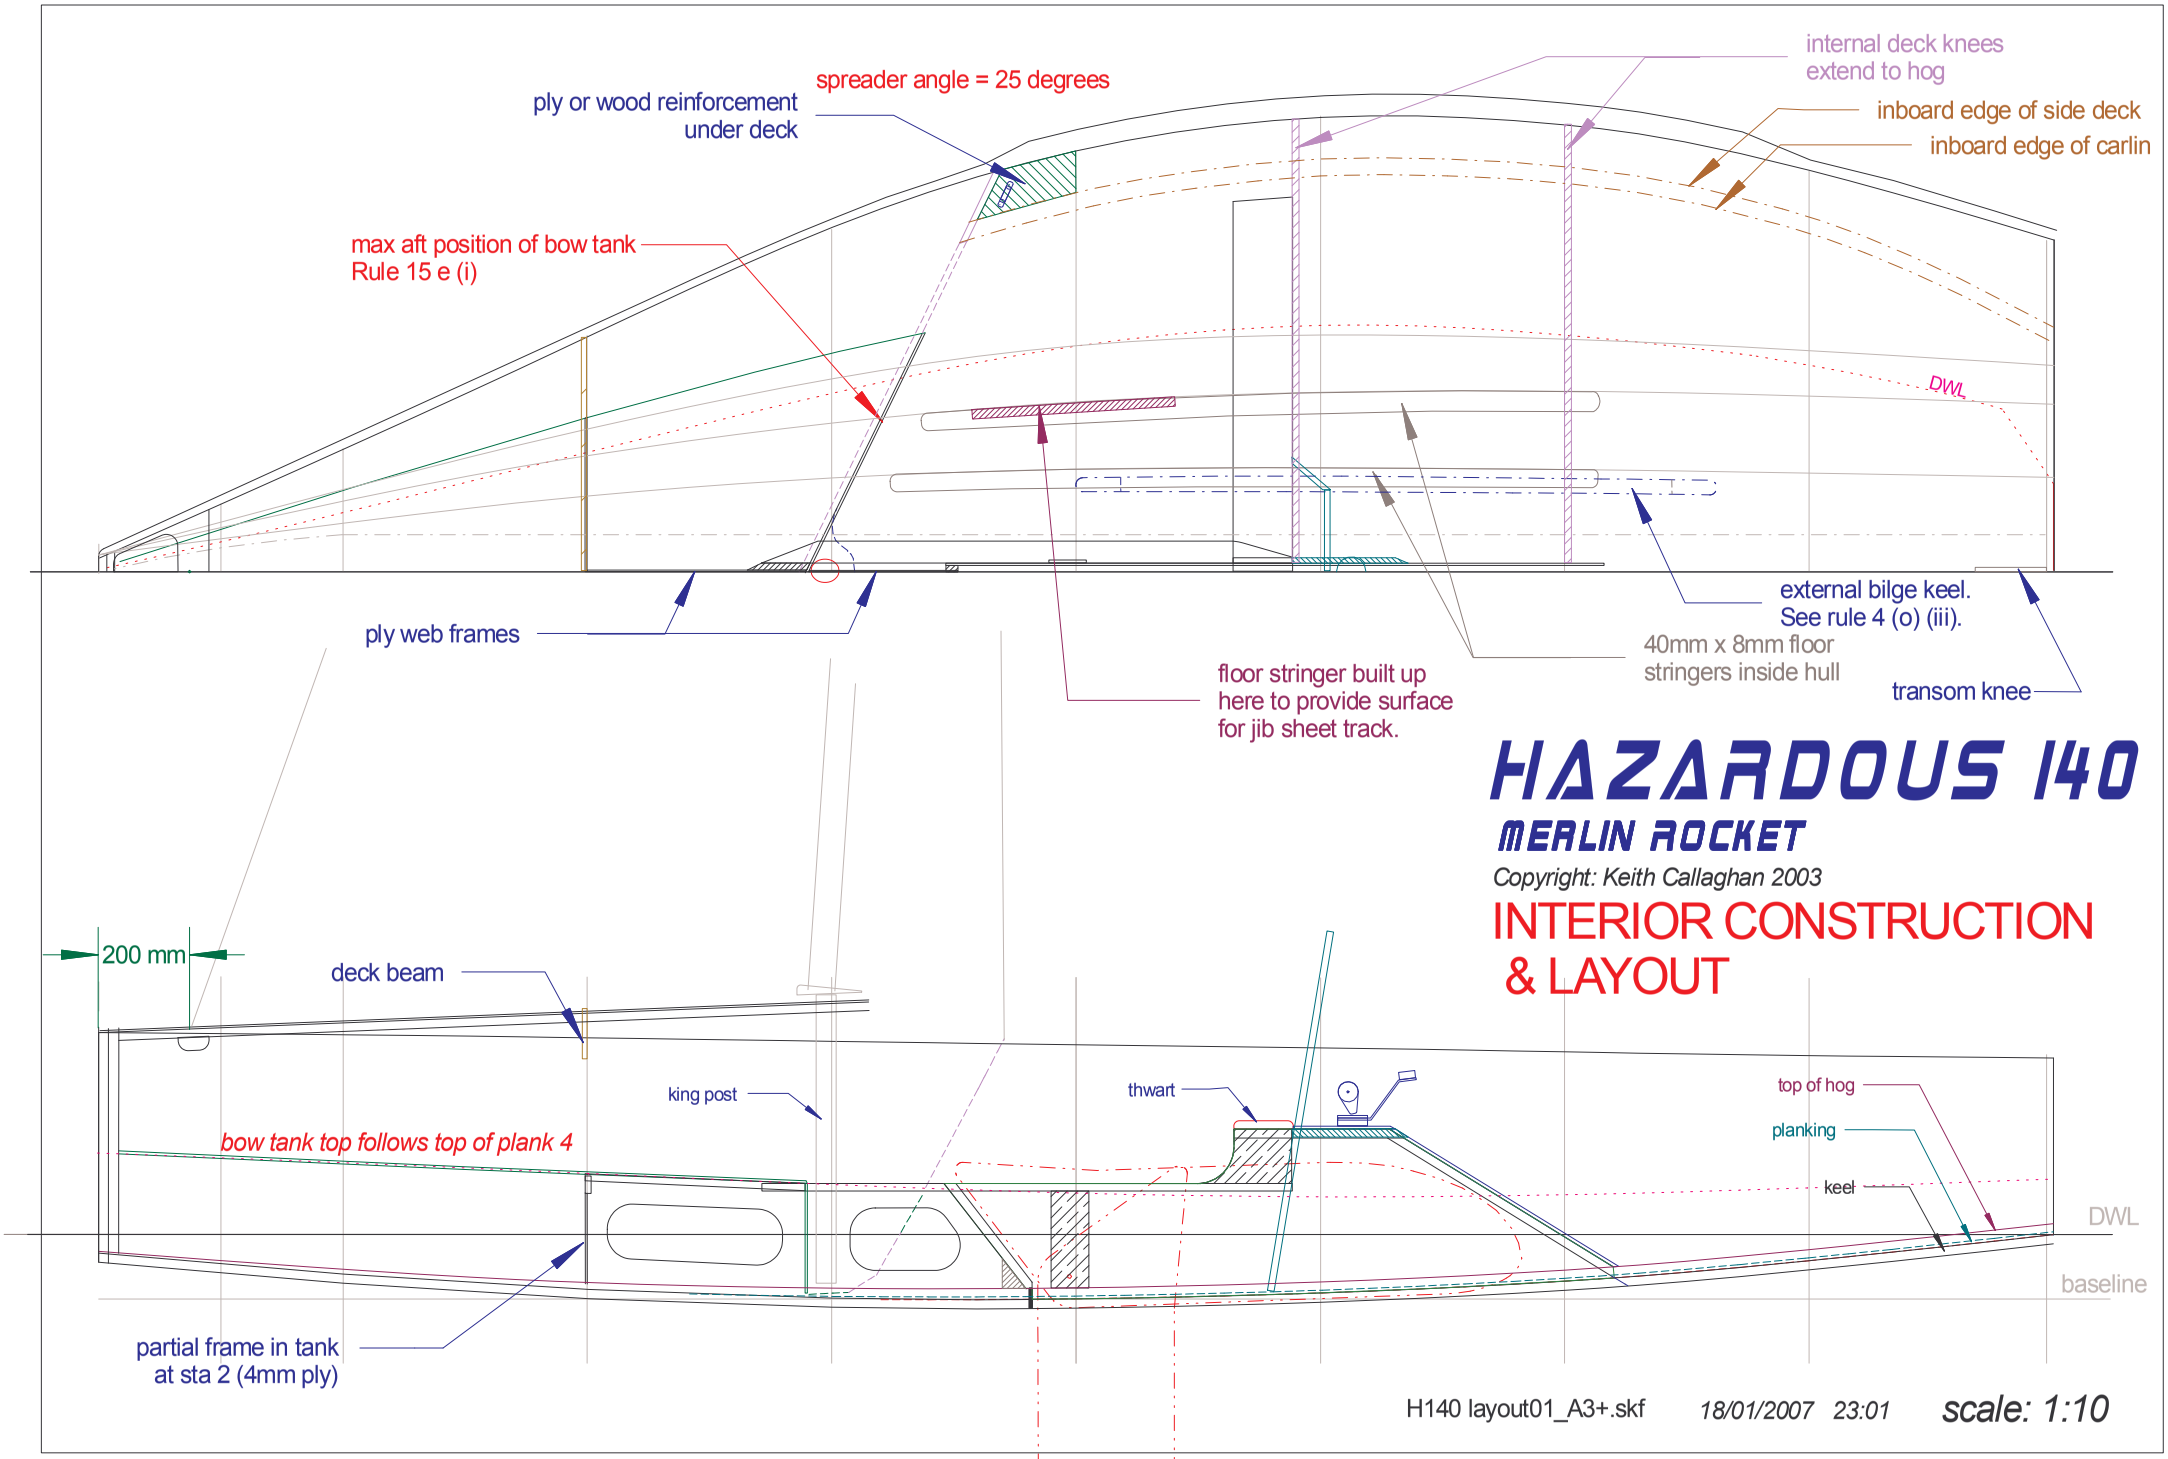
internal deck knees
extend to hog
spreader angle = 25 degrees
ply or wood reinforcement
under deck
inboard edge of side deck
inboard edge of carlin
max aft position of bow tank
Rule 15 e (i)
DWL
ply web frames
external bilge keel.
See rule 4 (o) (iii).
40mm x 8mm floor
stringers inside hull
floor stringer built up
here to provide surface
for jib sheet track.
transom knee
HAZARDOUS 140
MERLIN ROCKET
Copyright: Keith Callaghan 2003
INTERIOR CONSTRUCTION
& LAYOUT
200 mm
deck beam
king post
thwart
top of hog
planking
bow tank top follows top of plank 4
keel
DWL
baseline
partial frame in tank
at sta 2 (4mm ply)
H140 layout01_A3+.skf
18/01/2007 23:01
scale: 1:10